


Using SLA-35 line-matching amplifier with LA-300 and LA-600 loop amplifiers

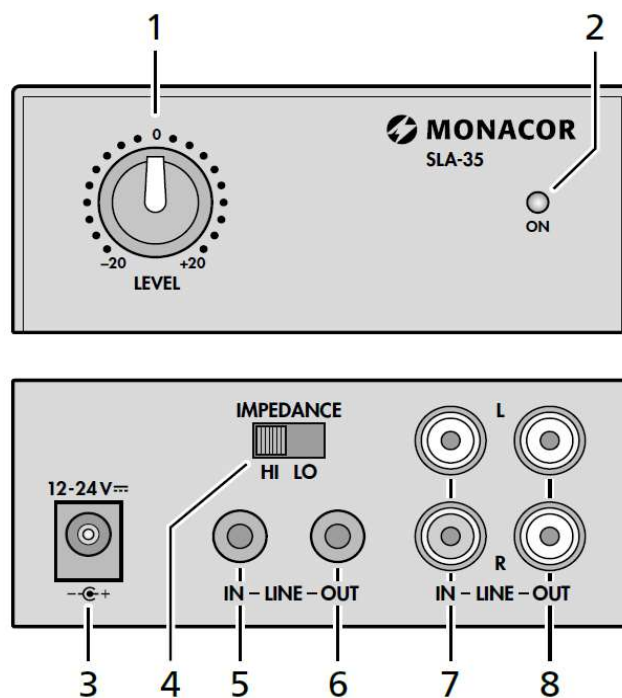

Connect the line-output of the A series, RM series or other PA amplifier to the twin phono inputs (7) of the SLA-35

Connect the twin phono outputs (8) of the SLA-35 to one pair of phono inputs on the LA series loop amplifier

Connect the power supply to DC input socket (3) on the SLA-35 and turn its volume control (1) to full

Play music over the main sound system and switch the hi – lo impedance selector (4) for the best results from the induction loop

Input mixer controls on the PA amplifier should be set fairly high and the master volume control on the PA amplifier should be kept to a lower setting this will give you the best results